Composting Toilet

Wostman Eco Dry Porcelain Separating Compost Toilet - AC or DC - Urine Diverting - Split System

Price: £1,642 inc. VAT | €1,785 inc. VAT

BUY NOW

Wostman Eco Dry composting toilet is suitable in applications where there is space below the floor for the 100 litre container. Ideal for people with a preference for a ceramic toilet to give a traditional, quality feel. The toilet needs a 100 litre container below the floor which is included in the pack. The Wostman Eco Dry composting toilet does require mains water for the micro flush for the urine section. The running costs of this dry toilet are low as only a 14 watt fan (AC 230 V) is running.

- Wostman Eco Dry toilet needs 100 L container below the floor – included in price
- Available to run on DC battery or AC mains electricity
- Porcelain
- Soft close seat – White
- Odour free and easy to use
- Urine is diverted – men must sit to urinate
- Download the EcoDry Manual 2017

- Min height from underside of floor for install container below is 700mm
- Container itself is 470mm tall, 650mm long, 440 wide

Description | Technical | Installation | Accessories | Get Advice

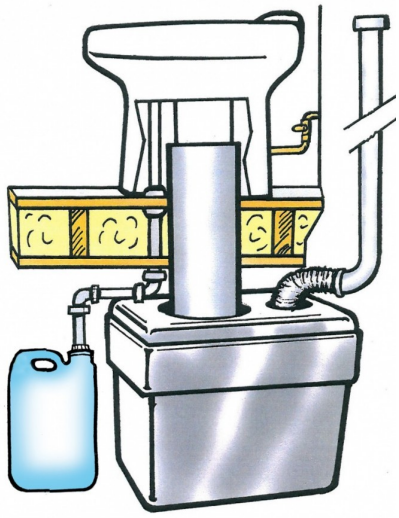

The Wostman Eco Dry composting toilet system is molded to divert urine and allow solids to fall into the container below. The product is vented from the container below. The button at the back of the toilet, behind the lid, is a micro flush which if connected to mains (½") will flush 100 ml – 200 ml of water. The flush mechanism uses 9 volt power. The flush is for the urine section only. You can "flush" this manually with a cup of water from the tap if you prefer.

Included as standard

- Soft close toilet seat
- Urine pipe
- 50 mm to 32 mm reducer
- 9 V Battery **or** Transformer (plug in) for the flush valve
- 14 Watt Fan (230V) or DC version
- 200 mm (diameter) 750mm length drop pipe and mounting brackets

Not Included

- Ballofix / stop cock for the water connection
- 75 mm diameter vent pipe
- You may choose to place the container on a wheeled trolley (suitable for 200 Kgs)

When the time comes to empty the container. Lift the lid on the container up along the shaft of the downpipe. The down pipe does not move as it is attached to the porcelain toilet, but the lid can slide up the shaft of the container. The container can slide out for removal while you gently put the lid down.